

Diesel Generating Set TNKS-17

50Hz

General Features

- **Engine** D1703-E2BG-CHN-1 Kubota Made in Japan
- **Alternator** PI044G Stamford Made in China
- **Controller** DSE4620 Deepsea Made in UK



- Electric speed control
- 12V starting batteries, maintenance-free type, connecting cables
- Equipped with CHINT MCCB; ABB in Option
- Equipped with industrial silencer and flexible exhaust hose
- Radiator 40°C max, fans are driven by belt with safety guard

- 12V charge dynamo
- Equipped with 8-hours operation base tank
- Design comply to ISO8528/GB2820
- Absorber (anti instant braking)
- User manual, Packing list

General Ratings

Voltage	Power				Frequency	Phase	P.F (COSϕ)	Prime Current
	Prime		Standby					
	kw	kva	kw	kva				
415/240V	12	15	13	17	(Hz)	3	0.8	(A)
400/230V	12	15	13	17	50	3	0.8	20.9
380/220V	12	15	13	17	50	3	0.8	21.7
								22.8

Prime power

This rating is for the supply of continuous electrical power at variable load. A 10% overload capability is available for a period of 1 hour within each 12-hour period of operation.

Standby power

This rating is for the supply of continuous electrical power at variable load in the event of utility power failure. No overload is permitted.

Rated voltage

Available with customers requirements.

Sales Promise

TANON POWER provides a full line of 100% brand new and high quality products.

Each and every unit is strictly factory tested before delivery.

Warranty is according to below standard conditions, subject to the earlier one.

1. 13 months, counted on the day TANON sold to the first buyer.
2. One year after installation.
3. 1000 running hours.


Service and parts are available from TANON or distributors in your location.

Dimension And Weight

Open frame

Size(L×W×H): 1250×800×1100(mm)


N.W.: 430 (kgs)

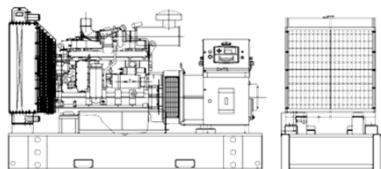

Silent with Canopy

Size(L×W×H): 1710×760×1080(mm)

N.W.: 650 (kgs)



Diesel Generating Set TNKS-17

50Hz

Engine Specifications

1	Engine model	D1703-E2BG-CHN-1
2	Engine manufacturer	Kubota
3	Number of cylinders	3
4	Cylinder arrangement	Vertical in line
5	Cycle	4 stroke
6	Aspiration	Naturally
7	Bore×Stroke(mm×mm)	87 x 92.4
8	Displacement (Liter)	1.647
9	Compression Ratio	23.0:1
10	Prime power/speed (kW/RPM)	12.8/1500RPM
11	Standby power/speed (kW/RPM)	15.1/1500RPM
12	Speed governor	Mechanical
13	Cooling system	Water-cooled
14	Coolant capacity (engine only) (L)	N/A
15	Steady speed droop (%)	≤5%
16	Total lubrication system capacity (L)	7.6
17	Oil consumption (% of fuel)	<0.15%
18	Fuel consumption at 100% load (L/H)	3.2
19	Fuel consumption at 75% load (L/H)	2.4
20	Fuel consumption at 50% load (L/H)	N/A
21	Starter motor	DC 12V/1.4KW
22	Dynamo	AC 12V/40A

Alternator Specifications

Compliance with GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359

1	Alternator model	PI044G
2	Alternator manufacturer	Stamford
3	Exciter type	Single bearing, Brushless, Self-excited
4	Rated output prime power	15kVA
5	Rated speed	1500 RPM
6	Rated frequency	50 Hz
7	Phase	3
8	Rated voltage	400V
9	Power factor	0.8
10	Voltage adjust range	≥5%
11	Voltage regulation NL-FL	≤±1%
12	Insulation grade	H
13	Protection grade	IP23

Alternator option

Leroy Somer, Stamford, TANON


Main Electrical Performance Data

Voltage				Frequency			
Stable Regulation rate	Fluctuation	Recover time	Instantaneous Regulating rate	Stable regulation rate	Instantaneous regulating rate	Recover time	Fluctua-tion
+/-2.5%	0.5%	1.5s	+20%/-15%	+5%	+/-10%	5S	0.5%

Diesel Generating Set TNKS-17

50Hz

Control System

Deepsea	Model	DSE4620
Protection	Parameter	PHOTO
• Low oil pressure	• Volt	
• High water temp	• current	
• Over speed	• power	
• over crank	• speed	
• Over load	• frequency	
• Over/low volt		
• Over/low frequency		
• Battery charge failure		
	• oil pressure	
	• oil temp	
	• power factor	
	• running time	
	• water temp	
	• battery voltage	

Option

Generator Set

- ☐ Trailer generator set
- ☐ ABB MCCB circuit breaker
- ☐ 50°C Radiator

Fuel system

- ☐ 12 hours base fuel tank
- ☐ 24 hours base fuel tank
- ☐ Dual wall base fuel tank
- ☐ External fuel tank

Exhaust system

- ☐ Residential exhaust silencer

Alternator

- ☐ PMG excitation
- ☐ Anti Condensation Heater

For cold area

- ☐ Water heater
- ☐ Oil heater
- ☐ Rapid water preheater (diesel burner)

Auto system

- ☐ Remote Control panel
- ☐ ATS control cabinet
- ☐ Paralleling System

External ATS



220V water heater



Diesel powered heater



220V Oil heater Syn. Cabinet



Parker separator



TANON POWER reserves the right to change the specifications and design without notice.